



SAMPLING DEVICES

For
Electrical Apparatus Sampling

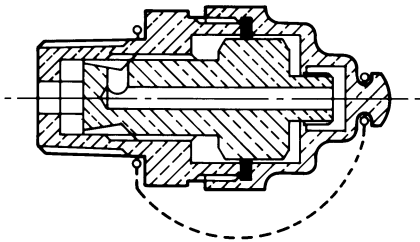


84363-C

Sampling Device has a protective cap. When cap is removed, fitting on drain outlet controls flow for taking a coolant sample. Coolant sample may be taken directly from sampler or a hose extension (tubing) may be attached to the $\frac{5}{16}$ " male thread on the end of the fitting. Parts machined from rod brass. Inlet is $\frac{3}{8}$ " thread.

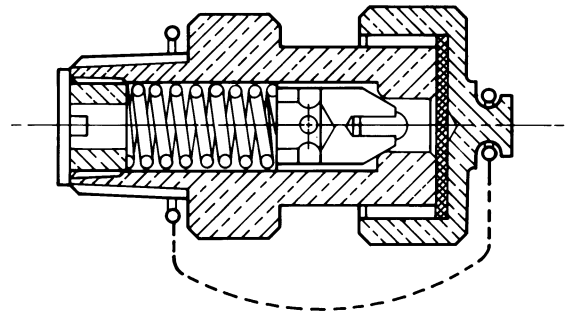


84679-D

Spring loaded, self-closing sampling device with a protective cap. Prevents inadvertent flow, tampering or loss of coolant. Entry of water is also prevented. Can be opened with a standard operating cap or tool.

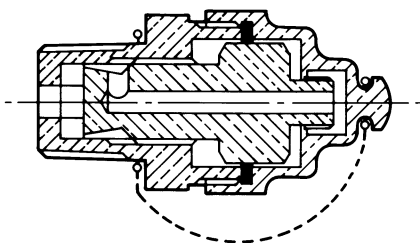

84363-D

Same as 84363-C except inlet thread is $\frac{1}{2}$ ".

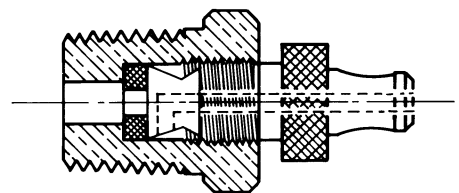

84680-D

Similar to the 84363-D except it does not have a protective cap. Outlet drain is shaped with a hose bibb for tubing connection.

