



Iron Gate Valve for Potable Water
300 psi (2 1/2" - 12") 250 psi (14" - 16")
Rising Stem • Resilient Wedge • OS & Y
Bolted Bonnet • Flanged Ends
Epoxy Coated Interior/Exterior
Drilled Tapped & Plugged at Boss Location A


F-2885-MRW 2 1/2"-16"



NSF/ANSI 61
NSF/ANSI 372

300 PSI/20.6 Bar Non-Shock Cold Working Pressure

CERTIFIED LEAD-FREE* BY TRUESDAIL LABORATORIES TO NSF/ANSI 61 & 372

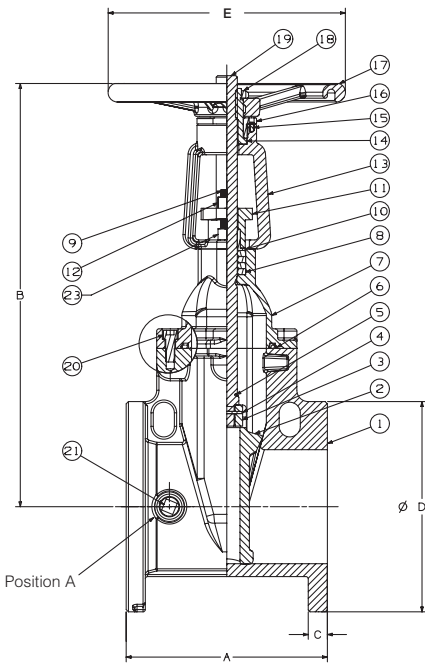

MATERIAL LIST			
No.	PART	MATERIAL	SPECIFICATION
1	Valve Body	Ductile Iron	ASTM A536
2	Resilient Wedge	Ductile Iron	ASTM A536/EPDM ASTM D2000
3	Wedge Nut	Bronze	ASTM B584 UNS C83600
4	Dowel Pin	Stainless Steel	ASTM A276 SS304
5	Stem Back Seat O-Ring	EPDM	ASTM D2000
6	Bonnet Gasket	EPDM	ASTM D2000
7	Bonnet	Ductile Iron	ASTM A536
8	Stem Packing	EPDM	ASTM D2000
9	Threaded Rod	Stainless Steel	ASTM A276 SS304
10	Gland Bushing	Bronze	ASTM B584 UNS C83600
11	Gland	Ductile Iron	ASTM A536
12	Gland Nut	Aluminum Bronze	ASTM B148 C95200
13	Yoke	Ductile Iron	ASTM A536
14	Yoke Bushing	Brass	ASTM B150 C61400
15	Flat Point Set Screw	Steel	ASTM F912M
16	Yoke Bushing Retainer	Cast Iron	ASTM A126 Class B
17	Handwheel	Ductile Iron	ASTM A536
18	Handwheel Nut	Carbon Steel Corrosion Resistant	Commercial
19	Stem	Stainless Steel 304	Commercial
20	Bonnet Screw	Corrosion-Resistant Steel	Commercial
21	NPT Pipe Plug	Steel	ASME B16.14
22	UL/FM Label (Not Shown)	Aluminum	Commercial
23	Yoke Screw	Steel Plated	ASTM A307
24	Drive Screw Label (Not Shown)	Stainless Steel 304	Commercial

Coating- Electrostatically applied fusion-bonded epoxy 8-20 mil. inside and outside meets or exceeds AWWA C550. **Drilled, tapped and plugged at position A with 1/2" sizes 2 1/2" - 4", 3/4" on 6" - 8", 1" on 10" - 12".

Note 1: Flanged valve is consistent with ANSI B16.1 Class 125.

Note 2: Available without grooved stem and tapped side boss. Order 2885-MRWB

DIMENSIONS - INCHES/MILLIMETERS								
Units	Size	A	B Open	B Closed	C	D	E	C _v
Inches	2 1/2	7.50	17.98	14.90	0.69	7.00	7.90	335
mm		190	453	378	19	178	2.00	
Inches	3	8.00	19.70	15.90	0.75	7.50	7.90	510
mm		203	500	405	19	191	2.00	
Inches	4	9.00	21.00	16.60	0.94	9.00	10.20	945
mm		229	534	442	24	229	260	
Inches	6	10.50	29.30	22.90	1.00	11.00	12.40	2250
mm		267	744	581	25	279	315	
Inches	8	11.50	37.00	28.50	1.13	13.50	14.80	4150
mm		292	939	724	29	343	375	
Inches	10	13.00	44.80	34.50	1.19	16.00	16.40	6700
mm		330	1139	877	30	406	406	
Inches	12	14.00	52.20	39.90	1.25	19.00	17.51	9925
mm		356	1326	1014	32	483	445	
Inches	14	15.00	62.20	50.00	1.38	21.00	19.70	13800
mm		381	1580	1270	35	533	500	
Inches	16	16.00	65.90	50.40	1.44	23.50	19.70	18375
mm		406	1674	1280	37	597	500	

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com.

⚠ State of California Prop 65 **WARNING: Cancer and Reproductive Harm.** For more information visit www.p65warnings.ca.gov.

