


# 1548B/1548T 3/8"-2"

**Bronze Lift Check Valve**  
**250 WOG †**  
**Spring Loaded • Solder Ends**  
**Buna (B) or TFE (T)**

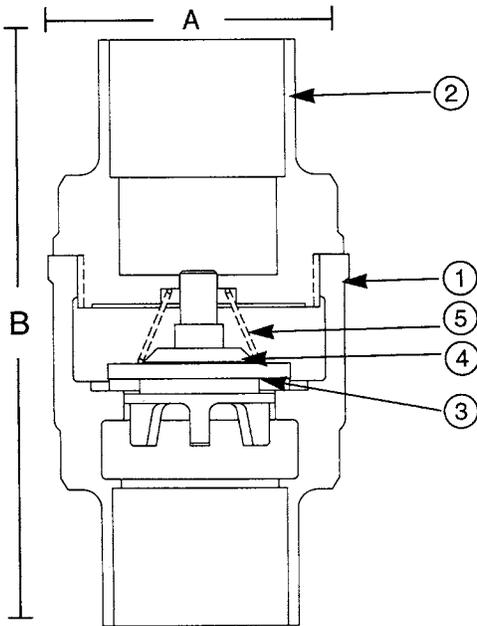

MATERIAL LIST			
No.	PART	MATERIAL	SPECIFICATION
1	Body	Cast Bronze	ASTM B584, C84400
2	Tail Piece	Cast Bronze	ASTM B584, C84400
3	Disc	TFE/BUNA*	
4	Disc Holder	Cast Bronze	ASTM B584, C85700
5	Spring	Bronze	ASTM B103, C52100

**Do not use for reciprocating air compressor service.**

**Note 1:** Not intended for use in potable water.

**Note 2:** Check Valves may be installed in both the horizontal and vertical lines with upward flow or in any intermediate position.

DIMENSIONS - INCHES/MILLIMETERS					
Units	Size	A	B	Weight	C <sub>v</sub>
Inches mm	3/8	1.22 31	1.97 50	0.35	2.5
Inches mm	1/2	1.22 31	2.41 61	0.45	4.1
Inches mm	3/4	1.50 38	2.81 71	0.62	7.6
Inches mm	1	1.91 48	3.53 90	0.97	13.0
Inches mm	1 1/4	2.16 55	4.22 107	1.42	23.0
Inches mm	1 1/2	2.59 66	4.88 124	1.84	31.0
Inches mm	2	3.13 79	5.09 129	2.75	54.0

**INNOVATION** IN EVERY VALVE



**MILWAUKEE VALVE**

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.milwaukeevalve.com](http://www.milwaukeevalve.com). State of California Prop 65  
**WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).