


BA260LDC/BA261LDC 1/4"-3"

Stainless Steel Ball Valve (BA260)
 Carbon Steel Ball Valve (BA261)
 Full Port
 1000 WOG
 120VAC Electric Actuator
 Blow-Out Proof Stem
 Specifications: MSS SP-110

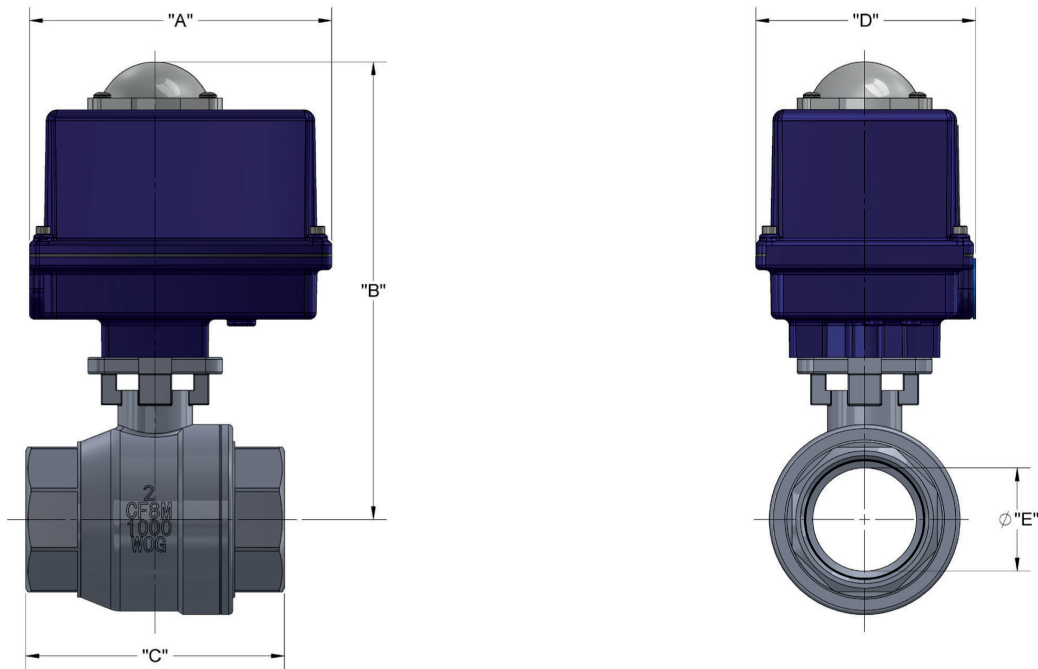

- CF8M (316 SS) or WCB two-piece full port
- SS ball and stem
- RPTFE seats and PTFE packing
- 1000 psig rated @ 100°F / 150 psi SWP
- Temp range: -20° to 450°F
- 120VAC NEMA 4 rated electric actuator
- 25% duty cycle
- Two limit switches / Remote light indication
- Manual override
- Visual position indicator
- For on/off service

ELECTRIC ACTUATOR ASSEMBLY DIMENSIONS						
VALVE	MODEL	DIMENSIONS IN INCHES				
Size	Actuator	A	B	C	D	E
1/4	MCR100	6.44	7.31	2.64	4.13	0.42
3/8	MCR100	6.44	7.31	2.64	4.13	0.50
1/2	MCR100	6.44	7.31	2.64	4.13	0.59
3/4	MCR100	6.44	7.59	2.76	4.13	0.79
1	MCR200	6.88	8.58	3.35	4.25	0.98
1 1/4	MCR200	6.88	8.78	3.70	4.25	1.26
1 1/2	MCR300	6.88	9.10	4.13	4.25	1.50
2	MCR675	7.00	12.10	4.92	7.00	1.97
2 1/2	MCR675	7.00	13.03	6.10	7.00	2.50
3	MCR1000	7.00	13.32	6.81	7.00	2.99

* Stainless steel model shown. Carbon Steel model will have "WCB" body markings

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com.

⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

