



**CLA23E 2"-12"**





ABS Type Approved;  
Cat. A  
CFR-46



Tested and Certified by  
IAPMO R&T to NSF/ANSI 372  
and NSF/ANSI 61

**Iron Butterfly Valve for Potable Water  
Lug Style  
200 psi Non-Shock WOG  
Bi-Directional Dead End Service to 200 psi Max  
Air to Air Pneumatic Actuator  
Specifications: API-609 MSS SP-67 Type 1**

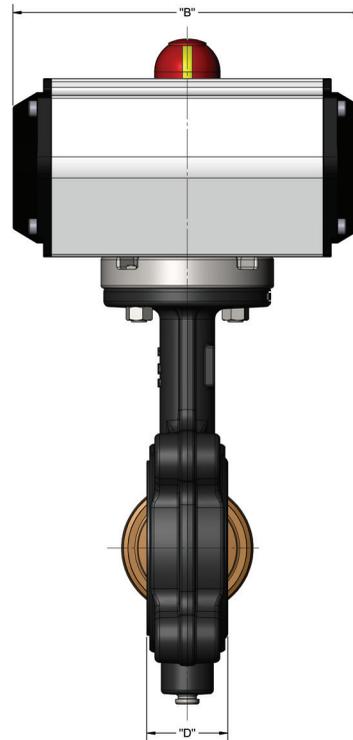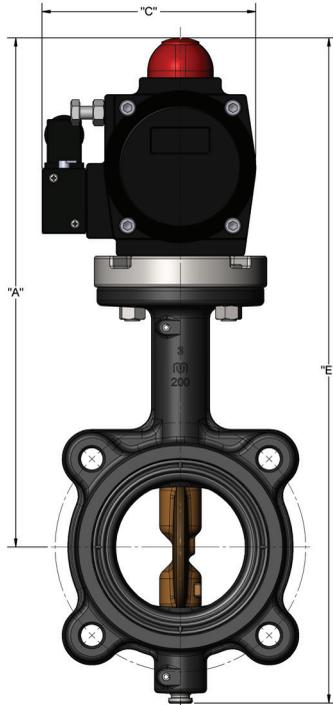

- Cast Iron
- Lug Pattern
- Aluminum Bronze Disc
- EPDM Liner
- 200 WOG
- Temp Range: 0° to 250° F for HVAC service
- Double-acting actuator sized for 80 psi air supply
- 120V NEMA 4/4x NAMUR mounted solenoid
- For on/off service

**DIMENSIONS**

AIR TO AIR ACTUATOR ASSEMBLY						
Valve Size	Model	Dimensions in Inches				
	Actuator	A "	B "	C "	D "	E "
2	MC3C	10.48	6.61	2.83	1.69	13.54
2 1/2	MC3C	10.98	6.61	2.83	1.81	14.29
3	MC3C	11.23	6.61	2.83	1.81	14.98
4	MC5C	12.45	7.24	3.19	2.07	16.70
5	MC5C	12.98	7.24	3.19	2.19	17.92
6	MC10C	14.14	10.31	3.86	2.19	19.70
8	MC29C	17.70	11.65	5.02	2.38	23.26
10	MC29C	18.88	11.65	5.02	2.69	26.76
12	MC58C	21.97	18.03	6.22	3.06	31.22

**Note:** Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.milwaukeevalve.com](http://www.milwaukeevalve.com).

⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

