


**HOSE NOZZLE P-202, P-2022**  
**BRONZE OR ALUMINUM**  
**Overwing Aircraft Refueling • Tank Trucks**  
**Bronze Internal Parts • 2 Stage Fulcrum Lever**  
**Balanced Dashpot Control**  
**Dual Disk**

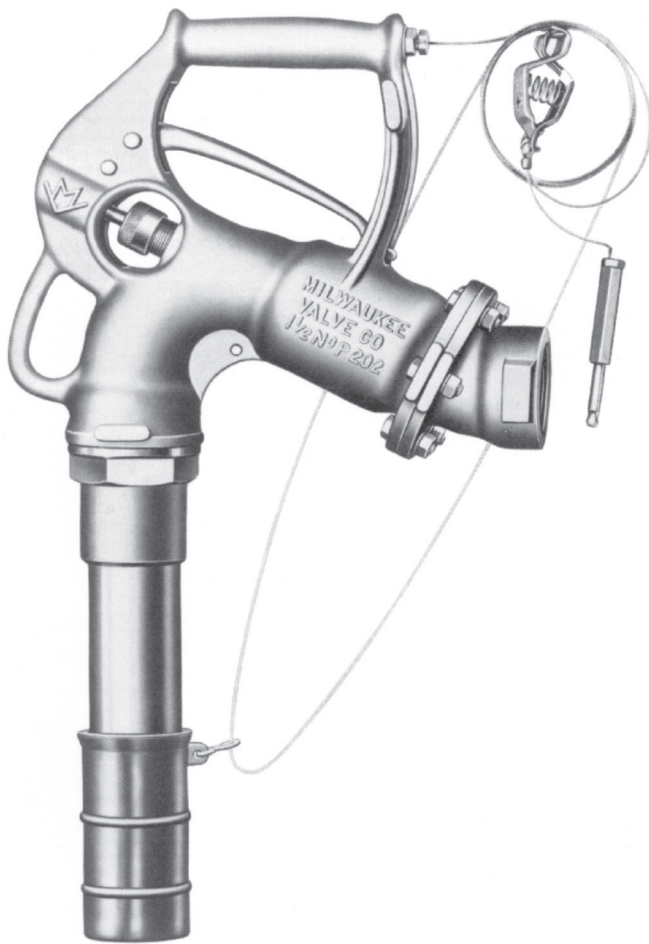


This easy-opening, soft-close valve minimizes shock. It is designed for operations up to 60 psi at inlet. Easy opening is achieved by balanced pressures on the valve assembly. Soft close controlled by balanced dashpot mechanism. Curved body minimizes friction and permits full flow. Poppet and dashpot assembly easily removed for repairs. Nozzle normally furnished with inlet adaptor, rigid tube, 100 mesh strainer, dust cap and ground cable. NPT inlet threads.

MODEL	SIZE/INCHES	DESCRIPTION
P-202	1 1/2, 2 2 1/2 x 2	Bronze (less strainer, cap and cable)
P-202-G	1 1/2, 2 2 1/2 x 2	Bronze (with strainer, cap and cable)
P-202-HG	1 1/2 x 1 1/4	Bronze (with reducing tube, strainer, cap and cable)
P-2022-R	1 1/4, 1 1/2, 2 2 1/2 x 2	Aluminum (less strainer, cap and cable)
P-2022-G	1 1/4, 1 1/2, 2 2 1/2 x 2	Aluminum (with strainer, cap and cable)
P-2022-HG	1 1/2 x 1 1/4	Aluminum (with reducing tube, strainer, cap and cable)

NOTE: P-2022 available with stainless steel trim for demineralized water.

MILITARY SPECIFICATION	
P-202	Conforms to MIL-N-4180 Type II
P-2022	Conforms to MIL-N-4180 Type I

AVAILABLE EXTRA	
P-84196	Filler Neck Protector



The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.milwaukeevalve.com](http://www.milwaukeevalve.com).  
 ⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

