


HOSE NOZZLE P-2056

ALUMINUM

Aircraft Refueling • Cushion Close
135 GPM 25 psi Inlet Nozzle Pressure
Aluminum & Stainless
Internal Parts

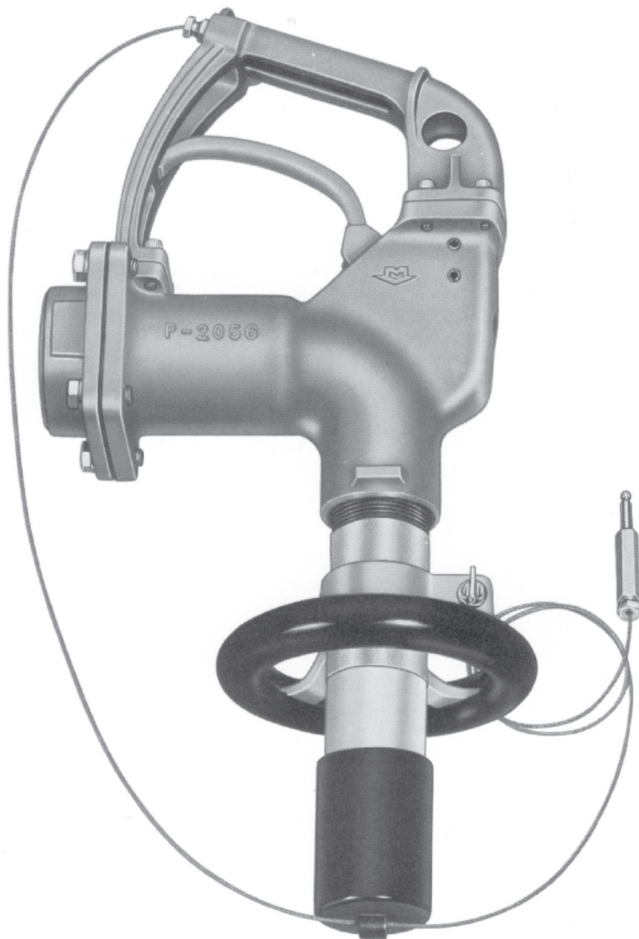

This Cushion Close Nozzle protects hose against hydraulic hammering effect with a timed soft close action. A tamper proof, non-adjustable design provides positive constant setting. Normal setting of 1.5 seconds is provided unless other is requested. This is a balanced valve with less than 15 lbs. lever pull under full line pressure from 25 to 70 psig. Line pressure offsets spring load for easy operation. Nozzle normally furnished with Aluminum Rigid Tube, 100 Mesh Strainer, Filler Neck Protector, Nozzle Cap and Ground Cable. P-2056 Nozzles are intended for use on ground equipment for servicing aviation fuel. Also can be used for servicing automotive fuels to ground vehicles and equipment.

SIZE

2" Inlet x 2" Outlet (Spout)

MILITARY SPECIFICATION

P-2056	Conforms to MIL-N-87963 Type MD-3
--------	-----------------------------------

AVAILABLE EXTRA

4178-HJ	2" x 1 1/2" Inlet Reducing Bushing
4178-G5A	2" x 1 1/4" Inlet Reducing Bushing

