

# LIFT CHECK P-728

## ALUMINUM


Dry Bulk Transports • Tank Trucks • 125 psi WOG †@ 100°F

25 psi @ 350°F • Spring Loaded

Composition Disc

Threaded Ends

Vibration-proof disc construction, Viton-A\* renewable disc assures tight close at high temperature operation. Stainless poppet stem and disc retainer, guided top and bottom in friction free bushings.

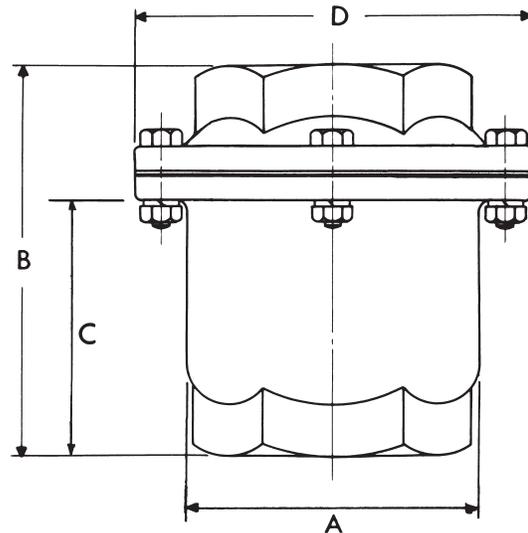

### DIMENSIONS-INCHES

SIZE	A	B	C	D
3	5	6 3/4	4 9/16	6 3/4

†Non-Shock

\*Registered E.I. DuPont Trademark

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.milwaukeevalve.com](http://www.milwaukeevalve.com).  
⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

