

LIFT CHECK P-729


ALUMINUM

Dry Bulk Transports • Tank Trucks • 125 psi WOG †@ 100°F
25 psi @ 350°F • Spring Loaded

Composition Disc


Flanged Ends

Vibration-proof disc construction, Viton-A* renewable disc assures tight close at high temperature operation. Stainless poppet stem and disc retainer, guided top and bottom in friction-free bushings. Similar Lift Check with Quick Coupler Outlet is also available. For Threaded Version see P-728.

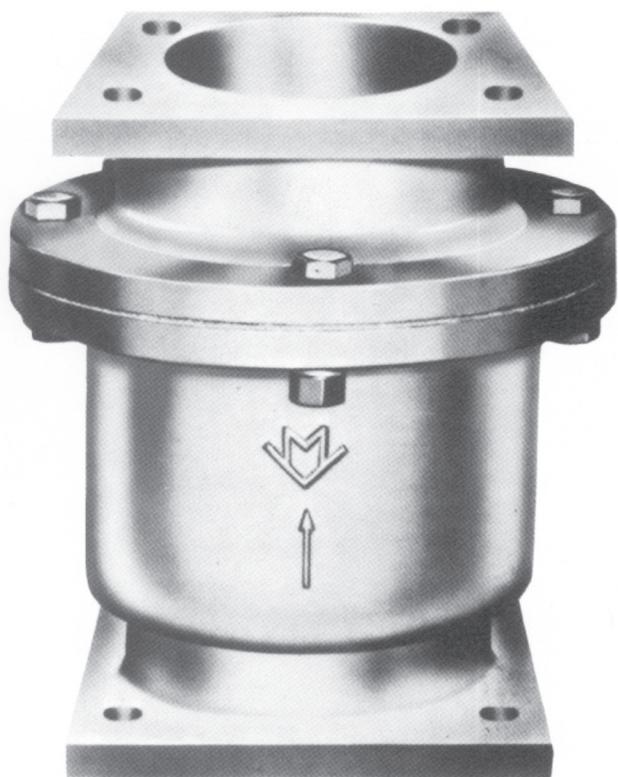

P-728

Threaded version.

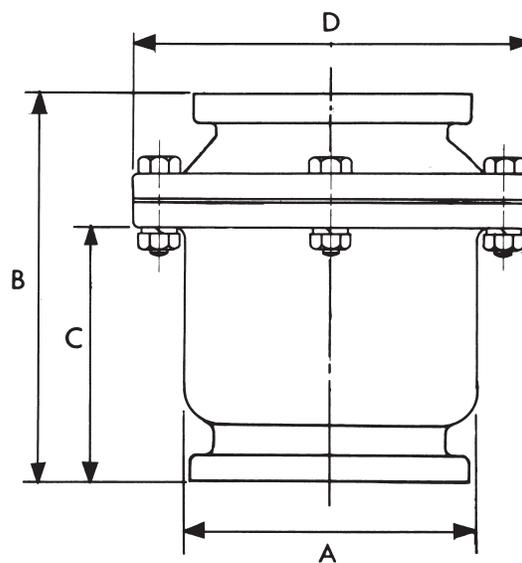

DIMENSIONS-INCHES

SIZE	A	B	C	D
3	5	6 7/8	4 3/4	6 3/4

FLANGE SPECIFICATIONS-INCHES

SIZE	FLANGE	B.C. DIA.	B.H. DIA.
3	4 3/4 Sq.	5	9/16

†Non-Shock

*Registered E.I. DuPont Trademark

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com.
⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

