Bronze Lift Check Valve For Potable Water
250 psig WOG †
PTFE Disc
Spring Loaded • Solder Ends

UP1548T %"-2"




MATERIALS LIST

ITEM	PART	MATERIALS	ASTM SPEC.			
1	Body	Cast Bronze	B584 C89833			
2	Tail Piece	Cast Bronze	B584 C89833			
3	Disc	PTFE	Commercial			
4	Disc Holder	Cast Bronze	B584 C89833			
5	Spring	Stainless Steel	A276 S30400			

DIMENSIONS

Units	Size	Α	В	Cv	
INCHES	3/8	1.22	2.16	2.5	
mm		31	55		
INCHES	1/2	1.22	2.41	1 4	
mm		31	61	4.1	
INCHES	3/4	1.50	2.81	7.6	
mm		38	71		
INCHES	1	1.91	3.53	12.0	
mm		48	90	13.0	
INCHES	1 1/4	2.16	4.88	23.0	
mm		55	124	23.0	
INCHES	1 1/2	2.59	4.22	31.0	
mm		66	107	31.0	
INCHES	2	3.13	5.09	54.0	
mm		79	129		

[†] Non-Shock

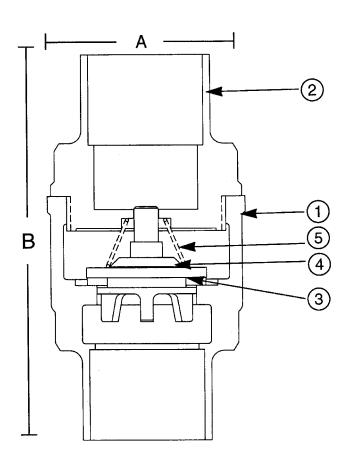

Note: Check Valves may be installed in both the horizontal and vertical lines with upward flow or in any intermediate position.

Note: Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤0.25%. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com.

\(\tilde{\Delta} \) State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.