



## UPBA400/400S\* P2 1/2"-2"


Bronze Ball Valve For Potable Water
Two Piece
Full Port
200 psig @ 250°F†
Press x Press Ends
Blow-Out Proof Stem

**Dimensions and Workmanship Conform to MSS SP-110** 

## MATERIAL LIST

IVIA I ENIAL LIST							
ITEM	PART	MATERIAL	ASTM SPEC				
1	Body	Cast Bronze	B584 C89833				
2	Tailpiece	Cast Bronze	B584 C89833				
3	Ball	Brass w/Hard Chrome Plating	B283 C27450				
		316 Stainless Steel (1)	A276 S31600				
4	Seat	RPTFE, 15% Glass Filled	Commercial				
5	Stem	Brass	B21 C46400				
		316 Stainless Steel (1)	A276 S31600				
6	Thrust Washer	RPTFE, 25% Glass Filled	Commercial				
7	Packing	PTFE	Commercial				
8	Packing Nut	Brass	B16 C36000				
9	Handle	Steel w/Zinc Plating	Commercial				
10	Handle Grip	Vinyl	Commercial				
11	Handle Nut	Steel w/Zinc Plating	Commercial				
12	Press Adapters	Brass Fitting w/EPDM O-Ring	B283 C27450				

(1) Ball and stem are stainless for UPBA400S

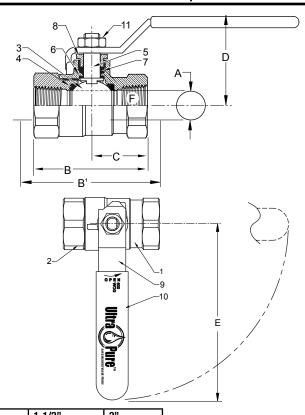

		10	$\sim$	NS
	-	$\sim$		$\sim$

	UNITS	1/2"   DN15	3/4" DN20	1" DN25	1-1/4"   DN32	1-1/2"   DN40	2" DN50
A (DIA)	INCHES	0.50	0.76	1.06	1.31	1.56	2.00
	mm	13	19	27	33	40	51
STD	INCHES	0.87	0.98	0.98	1.02	1.42	1.58
INSERTION DEPTH	mm	22	25	25	26	36	40
В	INCHES	2.19	2.59	3.32	3.77	4.28	5.10
B	mm	54	66	84	96	109	130
B <sup>1</sup>	INCHES	5.19	6.17	7.32	7.84	8.76	11.10
B.	mm	132	157	186	199	228	282
	INCHES	1.10	1.30	1.59	1.81	2.06	2.37
С	mm	27	33	40	46	52	60
D	INCHES	1.91	2.32	2.68	2.82	3.00	3.36
	mm	47	59	68	72	76	85
Е	INCHES	3.82	4.55	6.33	6.33	6.33	7.19
	mm	94	116	161	161	161	183
F	THREAD SIZE	1/2" NPT	3/4" NPT	1"NPT	1-1/4" NPT	1-1/2" NPT	2" NPT
Cv		13	30	61	110	185	360

Press End Adapter.

Available with Press x Threaded Ends (Order UPBA400P1/ UPBA400SP1)

Note: DN (Diameter Nominal) = Metric equivalent size.

†Non-Shock

\*Both the valve and 4151 series press end adapters are tested and certified by IAPMO R & T to NSF/ANSI 61 and NSF/ANSI 372 for "Lead Free" compliance.

**Note:** Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤0.25%. Source: California Health and Safety Code (116875).