

TØV Dimensions – Lug 3 to 12 Inches

ASME Class 150

Per API 609

3"-12" CLASS 150 LUG									
Valve Size		Valve Dimensions							
		A	B	C	D	ØE B.C.	F Hole	G	H
3	in	8.23	9.61	4.80	1.88	6.00	4 x 5/8-11 UNC-2B	1.97	1.10
	mm	209.0	244.0	122.0	47.7	152.4	4 x 5/8-11 UNC-2B	50.0	28.0
4	in	9.76	11.22	6.10	2.07	7.50	8 x 5/8-11 UNC-2B	2.20	1.22
	mm	248.0	285.0	155.0	52.7	190.5	8 x 5/8-11 UNC-2B	56.0	31.0
6	in	11.10	12.83	7.09	2.27	9.50	8 x 3/4-10 UNC-2B	2.36	1.40
	mm	282.0	326.0	180.0	57.7	241.3	8 x 3/4-10 UNC-2B	60.0	35.5
8	in	14.41	16.34	8.19	2.86	11.75	8 x 3/4-10 UNC-2B	2.64	1.50
	mm	366.0	415.0	208.0	72.7	298.4	8 x 3/4-10 UNC-2B	67.0	38.0
10	in	15.33	17.36	10.00	3.26	14.25	12 x 7/8-9 UNC-2B	2.91	1.65
	mm	389.5	441.0	254.0	82.7	362.0	12 x 7/8-9 UNC-2B	74.0	42.0
12	in	18.44	20.47	11.61	3.65	17.00	12 x 7/8-9 UNC-2B	3.31	1.91
	mm	468.5	520.0	295.0	92.7	431.8	12 x 7/8-9 UNC-2B	84.0	48.5

3"-12" CLASS 150 LUG									
Valve Size		Disc Dimensions				Gear Dimensions			Weight (lbs.)
		J Intrusion	K Chord Diameter	L Intrusion	M Chord Diameter	N	P	ØQ	
3	in	-	-	0.67	2.24	1.54	4.02	7.87	26
	mm	-	-	17.0	56.9	39	102	200	
4	in	0.32	1.99	1.03	3.10	2.05	6.57	11.81	46
	mm	8.1	50.5	26.2	78.7	52	167	300	
6	in	1.08	4.31	2.09	5.25	2.44	8.46	15.75	70
	mm	27.4	109.5	53.1	133.4	62	215	400	
8	in	1.94	6.41	2.83	7.05	3.11	9.06	19.69	110
	mm	49.3	162.8	71.9	179.1	79	230	500	
10	in	2.60	8.18	3.68	8.90	3.50	10.04	23.62	159
	mm	66.0	207.8	93.5	226.1	89	255	600	
12	in	3.21	9.95	4.53	10.75	3.50	10.04	23.62	241
	mm	81.5	252.7	115.1	273.1	89	255	600	

NOTES:


1. Face-to-face dimensions are in strict accordance with the latest edition of the stated standards.
2. Flange/end connections are in strict accordance with ASME B16.5 or ASME B16.47.

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change designed and/or materials without notice. For our Installation, Operations and Maintenance Manual (IOM) and the most current product information, go to www.milwaukeevalve.com.

⚠ State of California Prop 65 Warning: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.



TØV Dimensions – Lug 3 to 12 Inches
 ASME Class 150
 Per API 609

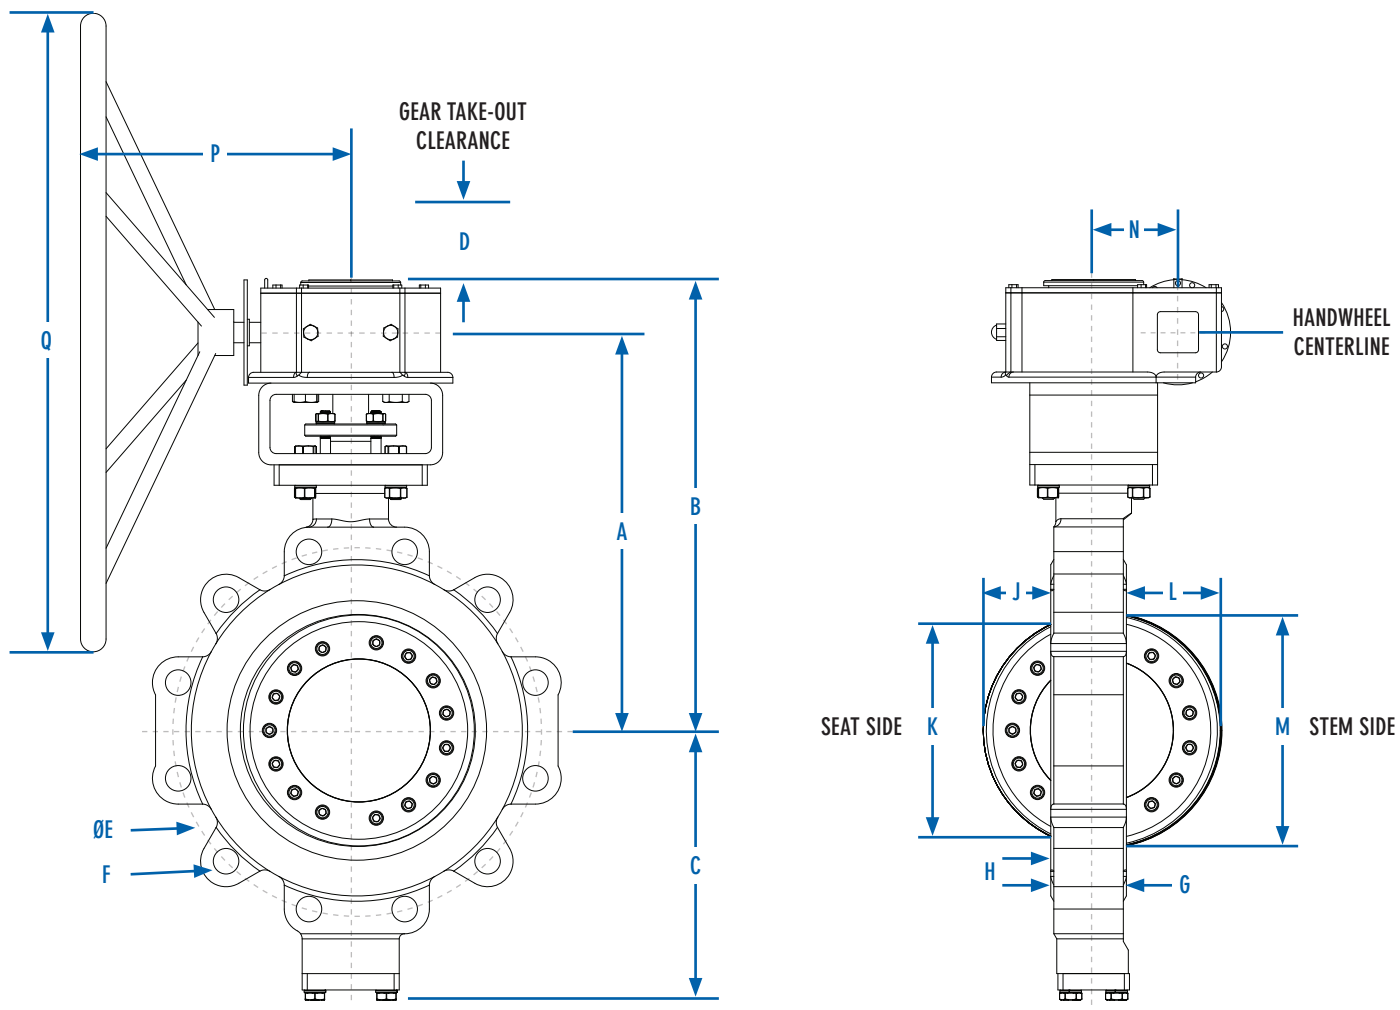

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change designed and/or materials without notice. For our Installation, Operations and Maintenance Manual (IOM) and the most current product information, go to www.milwaukeevalve.com.

△ State of California Prop 65 Warning: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

