
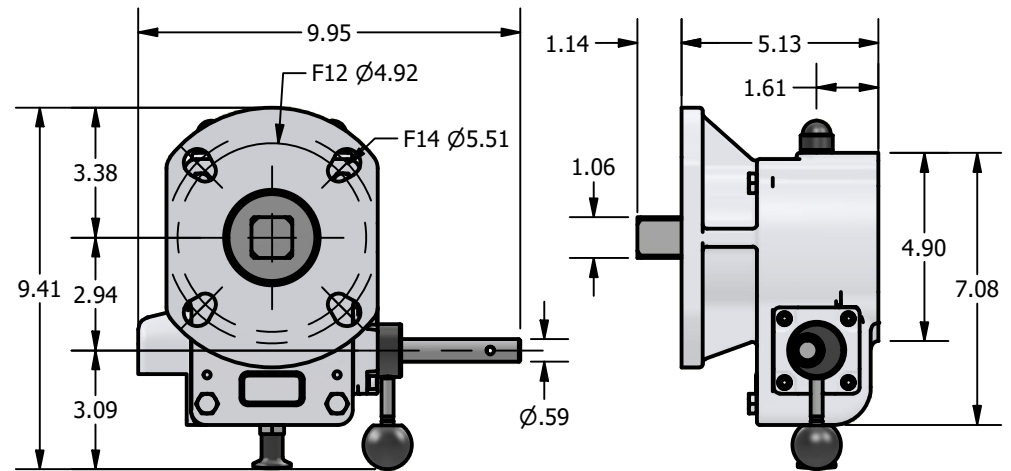


**NOTE:**

THREAD FOR F10 IS 3/8-16 UNC

THREAD FOR F12 IS 1/2-13 UNC

THREAD FOR F14 IS 5/8-11 UNC

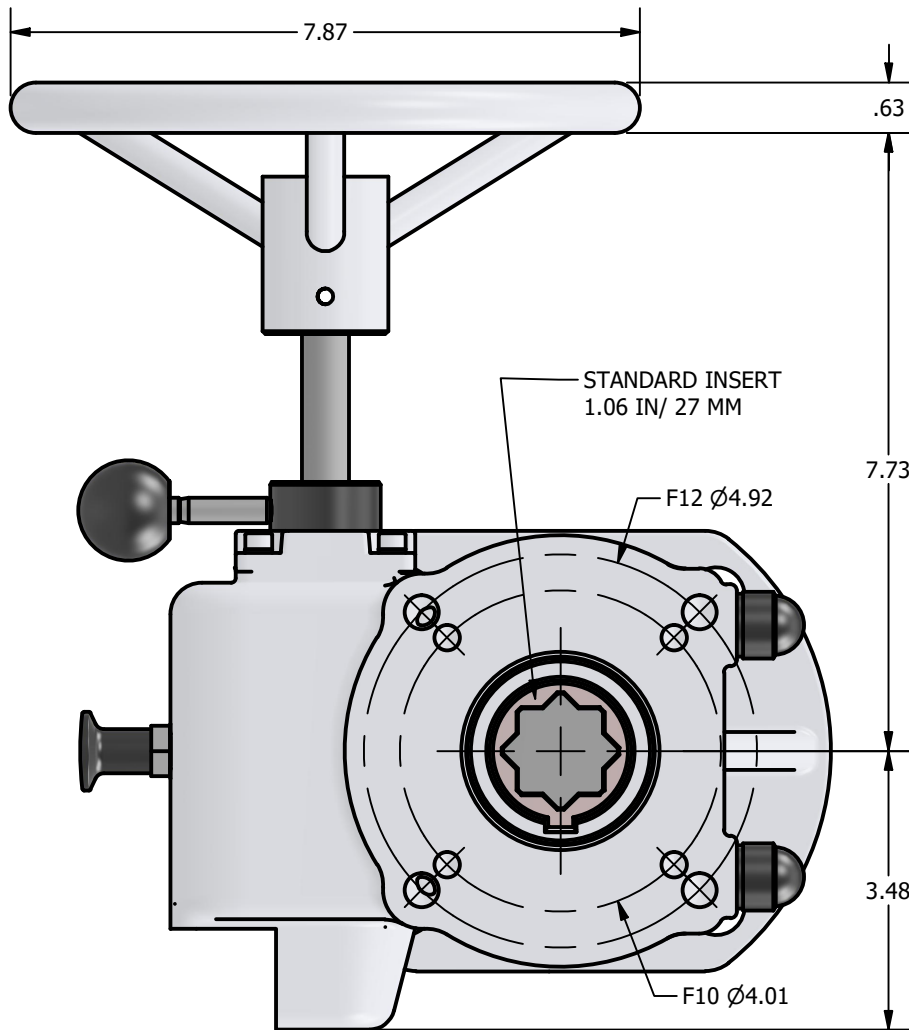

DESCRIPTION	MATERIAL
BODY	DUCTILE CAST IRON
COVER/FLANGE	DUCTILE CAST IRON
WORM RACK	DUCTILE CAST IRON
COVER/RACK	DUCTILE CAST IRON
QUADRANT	DUCTILE CAST IRON
WORM	CARBON STEEL
SHAFT	STAINLESS STEEL
COUPLING	STEEL
GASKET	NITRILE
O-RINGS	NITRILE
GREASE	LITHIUM
FASTENERS	STAINLESS STEEL
AXIAL BEARING	STEEL

## DESCRIPTION

Quarter Turn Type: UT-ZM-66

## NOTICE:

THIS DRAWING INCLUDES THE DESIGN AND PRINCIPLES DISCLOSED AND IS THE SOLE PROPERTY OF UNITORQ AND ITS AFFILIATES. IT IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED, NOR COPIED IN WHOLE OR IN PART, NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY, NOR USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF UNITORQ OR ANY OF ITS AFFILIATES WITHOUT THE EXPRESSED WRITTEN CONSENT OF UNITORQ. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

2150 Boggs Road, Suite 410  
DULUTH, GEORGIA U.S.A. 30096

Ph: 770-446-7074

Fax: 770-447-1825

www.unitorq.com

ISO 9001:2015  
CERTIFIED COMPANY

PRI Registrar

TYPE	TORQUE (In-Lbs)	RATIO	WEIGHT (lbs)
UT-ZM-66	6,638	1:52	35.3

PRODUCT: Quarter Turn Actuator	PART NUMBER: UT-ZM-66
-----------------------------------	--------------------------

SALES DRAWING NUMBER:

DWN BY:  
HPDATE:  
1/25/2024SCALE:  
N.T.SREV.  
0